

ATT: TRIPPLE T INVESTMENTS

80X10m FOWLRUNS (STEEL STRUCTURE ERRECTION WITH I.B.R SHEETS)

Please note that this is a quotation for steel structure construction without brickwork and floors, and it comes with separate quotations for associated poultry equipment supplies.

***SPECIAL FEATURES**: The Fowl run is designed in a way that makes it compatible with automated poultry equipment installations i.e. automated water systems / winched curtain systems*

We are pleased to respond to your inquiry with a quotation that reflects, after all deliberations and quantifications, the scope of work (indicated above) valued at:

TWENTY-NINE THOUSAND SIX HUNDRED AND SEVENTY-SIX DOLLARS ONLY

(Steel Fabrication Only)

Incaptta
Agri-Structures

Regards

F. A Mufambisi

Technical Manager Equipment Installations and Construction

No. 46 Northampton Crescent Eastlea North

www.incaptta.co.zw

sales@incaptta.co.zw

0774973250 /0714258125/07800221138



80X10M FOWLRUN (STEEL STRUCTURE

ERRECTION WITH I.B.R SHEETS)

BF.20/025

CONSTRUCTION

80M X 10M HOUSE(S)

8,000-12,000 BIRDS CAPACITY

(Steel structure without floors and brickwork)

Quotation N.0 87/2026

Incaptta

Agri-Structures

1 INTRODUCTION

Incaptta Agri-structures takes pleasure in the opportunity to quote on this project, and we are delighted and humbled to submit our proposal for your consideration.

We are company servicing the Agricultural field providing poultry related services that include Fowl run construction, automated PVC poultry curtains, nipple drinking systems, poultry management consulting. We have developed a strong and loyal customer following, and one salient element that identifies us is endurance and the urge to make all our clients' agribusiness decisions unregretable.

Incaptta
Agri Structures



Brickwork and Flooring Clause: The BOQ provides estimated prices for brickwork and flooring, which are excluded from the quoted total due to geographic price variation. Before commencement, the Client shall elect one of the following: (1) Contractor performs brickwork and flooring; (2) Client supplies all materials, and the Contractor provides labor only; or (3) Client supplies materials and labor and the Contractor provides consultancy on best-practice for a fowl-run compatible with automated equipment. The Consultancy Schedule shall define any consultancy scope and fees; final brickwork/flooring costs will be determined by the option chosen and any approved variation orders. **NB**: Steel structure erection and roofing are fixed price and supplied by the Contractor

80x10m Fowlrun (construction)				
UNT	QTY	ITEM	U.PRICE	TOTAL
BRICKS	***15000***	Common bricks (for 115mm thick wall)	**$0.00**	**$0.00**
pc	***7***	Deformed bar 14mm	**$6.00**	**$42.00**
m^3	***85***	River sand /quarry dust-(Foundation and flooring unit of volume in the International System of Units (SI)(Cm3)	**$20.00**	**$1,700.00**
m^3	***30***	Pit sand (Foundation and flooring unit of volume in the International System of Units (SI)(Cubic meters m3)	**$20.00**	**$600.00**
BAGS	***400***	Cement (Preferably Superset)	**$10.00**	**$4,000.00**
ROLLS	***2***	Damp proof course 230mm wall	**$2.50**	**$5.00**
LBR	***1***	Labor (construction -foundation ,inside plastering only, flooring , material)	**$4,000.00**	**$4,000.00**
m^3	***80***	Quarry Stones	**$18.00**	**$1,440.00**
m^2	***800***	Black polythene paper	**$0.39**	**$312.00**
litres	***80***	Termite poison	**$0.50**	**$40.00**
units	***11***	Brickforce 230x20	**$2.50**	**$27.50**
rolls	***14***	DPC 115X20	**$2.50**	**$35.00**
trips	***10***	Transport / deliveries	**$150.00**	**$1,500.00**
m^3	***0***	Gravel(To be calculated on site)	**$0.00**	**$0.00**
-	***1***	Supervisor transport	**$400.00**	**$400.00**
BRFCE	***16***	Brickforce.115x20	**$2.50**	**$40.00**
				$14,141.50

STEEL STRUCTURE SPECIFICATIONS

In consideration of standard recommended specifications of chicken houses against the clients' desired capacity, the following features will give you sound and uncompromised productivity. The structure will have a total length of **80m**, a clear width (free span) of **10m** and a height to eaves of **2.7 m (1.8m opening)**. The roof system is constructed from lattice trusses and high gauge tube iron purlins with 72mm middle support columns. The roof the warehouse is covered with 0.35mm pre-painted grey sheets, and the sides of the warehouse are open. The structure comes without mash wires, doors, floors etc.

As requested, the structure as priced in this estimate is supplied and installed with the following specifications and conditions

Layout and Construction

80CM Apex truss construction:	**H.T Angle Iron Truss**
Exceptional features	**Standard MPS**
Bay Spacing:	**5m**
Total Length:	**80m**
Total Width:	**10m clear span**
Purlin type:	**Channel**
Sheeting and flashing:	**0.4mm**
Sheeting Color:	**Charcoal grey (IBR)** **(fix & S)**
Side cladding height to:	**None(Byclient)**
End cladding height to:	**None(Byclient)**
Translucent panels:	**None**
Insulation requirements:	**Features considered**
Ventilation requirements:	**Features considered**
Doors:	**None (Byclient)**
Gutters and downpipes	**None**

This document and the information contained herein is the property of INCAPTTA PVT LTD and shall not be copied, either in whole or in part, or altered, transmitted or used for any purpose whatsoever, without prior written permission of INCAPTTA PVT LTD

Transport and Installation

Base works done by:	**INCAPTTA**
Steel Erection done by:	INCAPTTA
Roof Structure material transport to site by:	INCAPTTA
Brickworks Floors	INCAPTTA


New Structure 800m² including:

- 0.4mm grey IBR sheets – 72mm
- Middle Vertical supp. Channels Non-Clear span structure
- Material transport to site (Less than 60km from Harare)

Official specs: ref- INVOICE /QTE NO. Quotation N.0 75/2025

72mm h.g steel Poles 5.2m (100x10 CHNL cm w/o center support column (roof support + ground shuttering Allowance)

General sketch of structure layout (gable elevation)

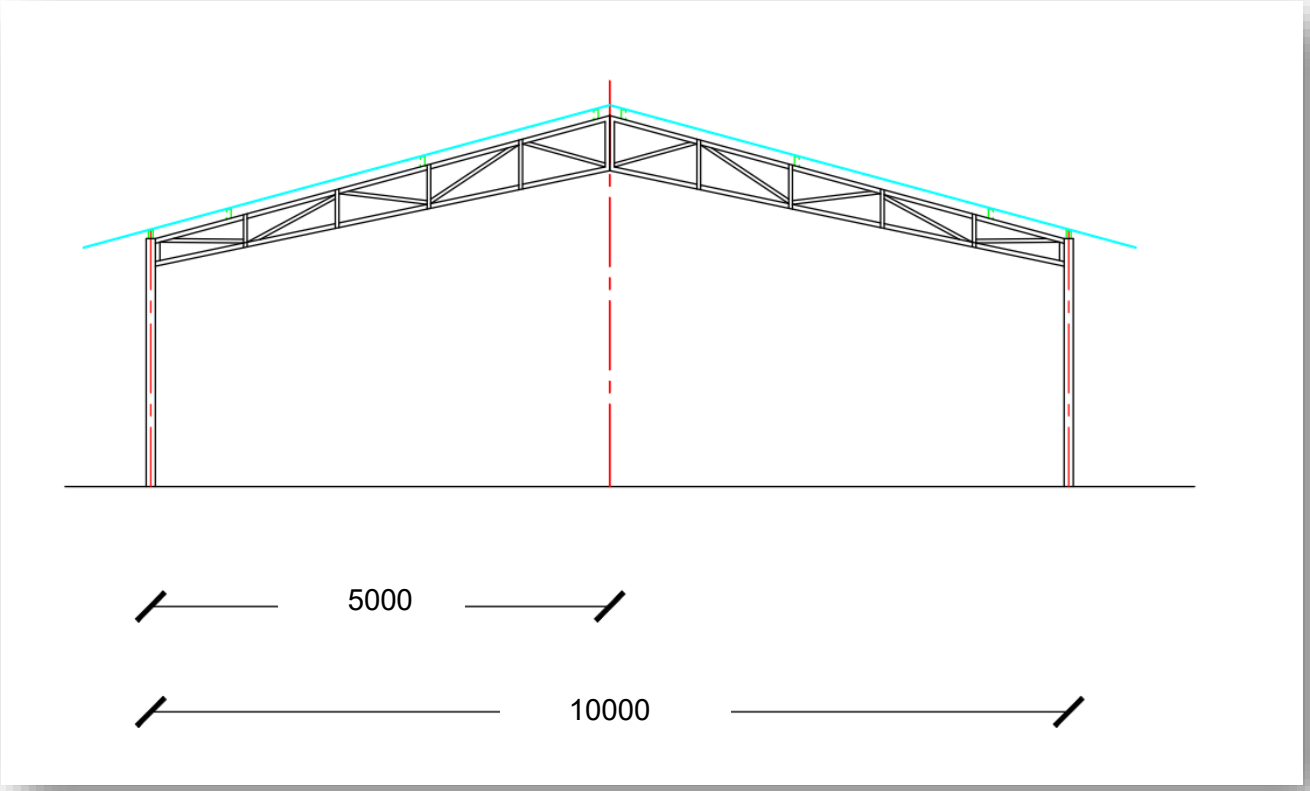

This document and the information contained herein is the property of INCAPTTA PVT LTD and shall not be copied, either in whole or in part, or altered, transmitted or used for any purpose whatsoever, without prior written permission of INCAPTTA PVT LTD

Fix and Supply Steel Structure

800 including: X1 House

- Site establishment
- Preliminary and generals and team's mobilization
- 0.4mm P.P I.B. R sheets
- Steelwork fabrication, prefab & erection
- Pre-setting & shuttering
- Material transport to site
- Construction Team transport
- Labor (ONSITE STEEL FAB)
- Pre-construction Site survey **$29,676.00**

Estimated base works material supplied by Contractor (inclusive of 20 % wastage):

— Cement	20x 50kg pockets4
— River sand	18m^3
— ¾" stone	18 m^3

Quantities based on level ground with good building conditions

Project Lead time & Schedule

- Dates to be provided by client
- Fabrication: 5-10 days from order
- Installation: +/- 24 days

Grand total is for fix and supply both steel fabrication and brickwork

NB: This quote does not include the cost of the required bricks

X1 HOUSE	Fowl run construction, including base works, steel structure erection and roof	$29,676.00
X1 HOUSE	Labor (brickwork (dwarf wall erection/ side wall Cladding, flooring)	$14,141.50
X1 HOUSE	Grand total	**$43,817.50**

This document and the information contained herein is the property of INCAPTTA PVT LTD and shall not be copied, either in whole or in part, or altered, transmitted or used for any purpose whatsoever, without prior written permission of INCAPTTA PVT LTD

(IF COMPLIMENTARY STRUCTURES ARE INCLUDED IN THIS QUOTE)
Project Lead time & Schedule

- Dates to be provided by client
- Construction, feed room and roof 16 days
- Construction, biosecurity shower rooms 16 days (see project timeline)
- Equipment Installation: +/- 11 days (see separate quote)

PAYMENT TERMS

- 85% deposit to open order, procure materials and fabricate trusses
- 15% balance before lipped channel installation and roofing of structure

BANK	A/C NO.	BRANCH	A/CNAME	BRANCH CODE	ACCOUNT NAME :
CABS	1133877044	CENTRAL AV.	INCAPTTA TRADING PVT. LTD		INCAPTTA TRADING PVT. LTD.
CBZ	27438930011	BORROWDALE	INCAPTTA TRADING PVT. LTD	029	

5. TERMS AND CONDITIONS BASIC TERMS OF ENGAGEMENT

- Delivery Periods quoted are given according to workload and availability of materials. Delays in confirming your order could change the quoted delivery time.
- If payment is made via Bank Transfer, then it is the CLIENT's responsibility to inform us immediately.
- Storage and security of goods in transit are the contractor's responsibility.
- Transport, demurrage and insurance are the responsibility of the Customer.

TERMS DURING TASK EXECUITION

- Our onsite staff will require accommodation when on site.
- The customer must ensure continuous electrical supply as required by installation teams. A generator can be hired at the client's expense in the event that there is no electricity

NB. Should you intend to be an out-grower of any company offering the services (e.g Surrey, Irvine's & Sable) please do advise us beforehand so that our technical team can/will deliver the service according to the specified requirements of each/any one of the entities above (this will help you save time wasted in doing remedial works)

OTHER REQUIREMENTS

For water systems installation: WATER TANKS SHOULD STRICTLY BE 2000L CAPACITY (not more or less)
NB: Water reservoirs are not included in all our quotations. You're required to set up water tank stands that are at a height of at least 4.2m above the ground best to achieve the standard pressure required by our CdYi3 regulators. For 100m fowl runs and above, you're required to erect x2 x2000L water tanks (one at the beginning and another in the middle position (50m mark) of the fowl run (from outside). Layout should be gradient friendly



F. A MUFAMBISI
Technical Manager Construction and Equipment Installations
Date 2026

This document and the information contained herein is the property of INCAPTTA PVT LTD and shall not be copied, either in whole or in part, or altered, transmitted or used for any purpose whatsoever, without prior written permission of INCAPTTA PVT LTD